

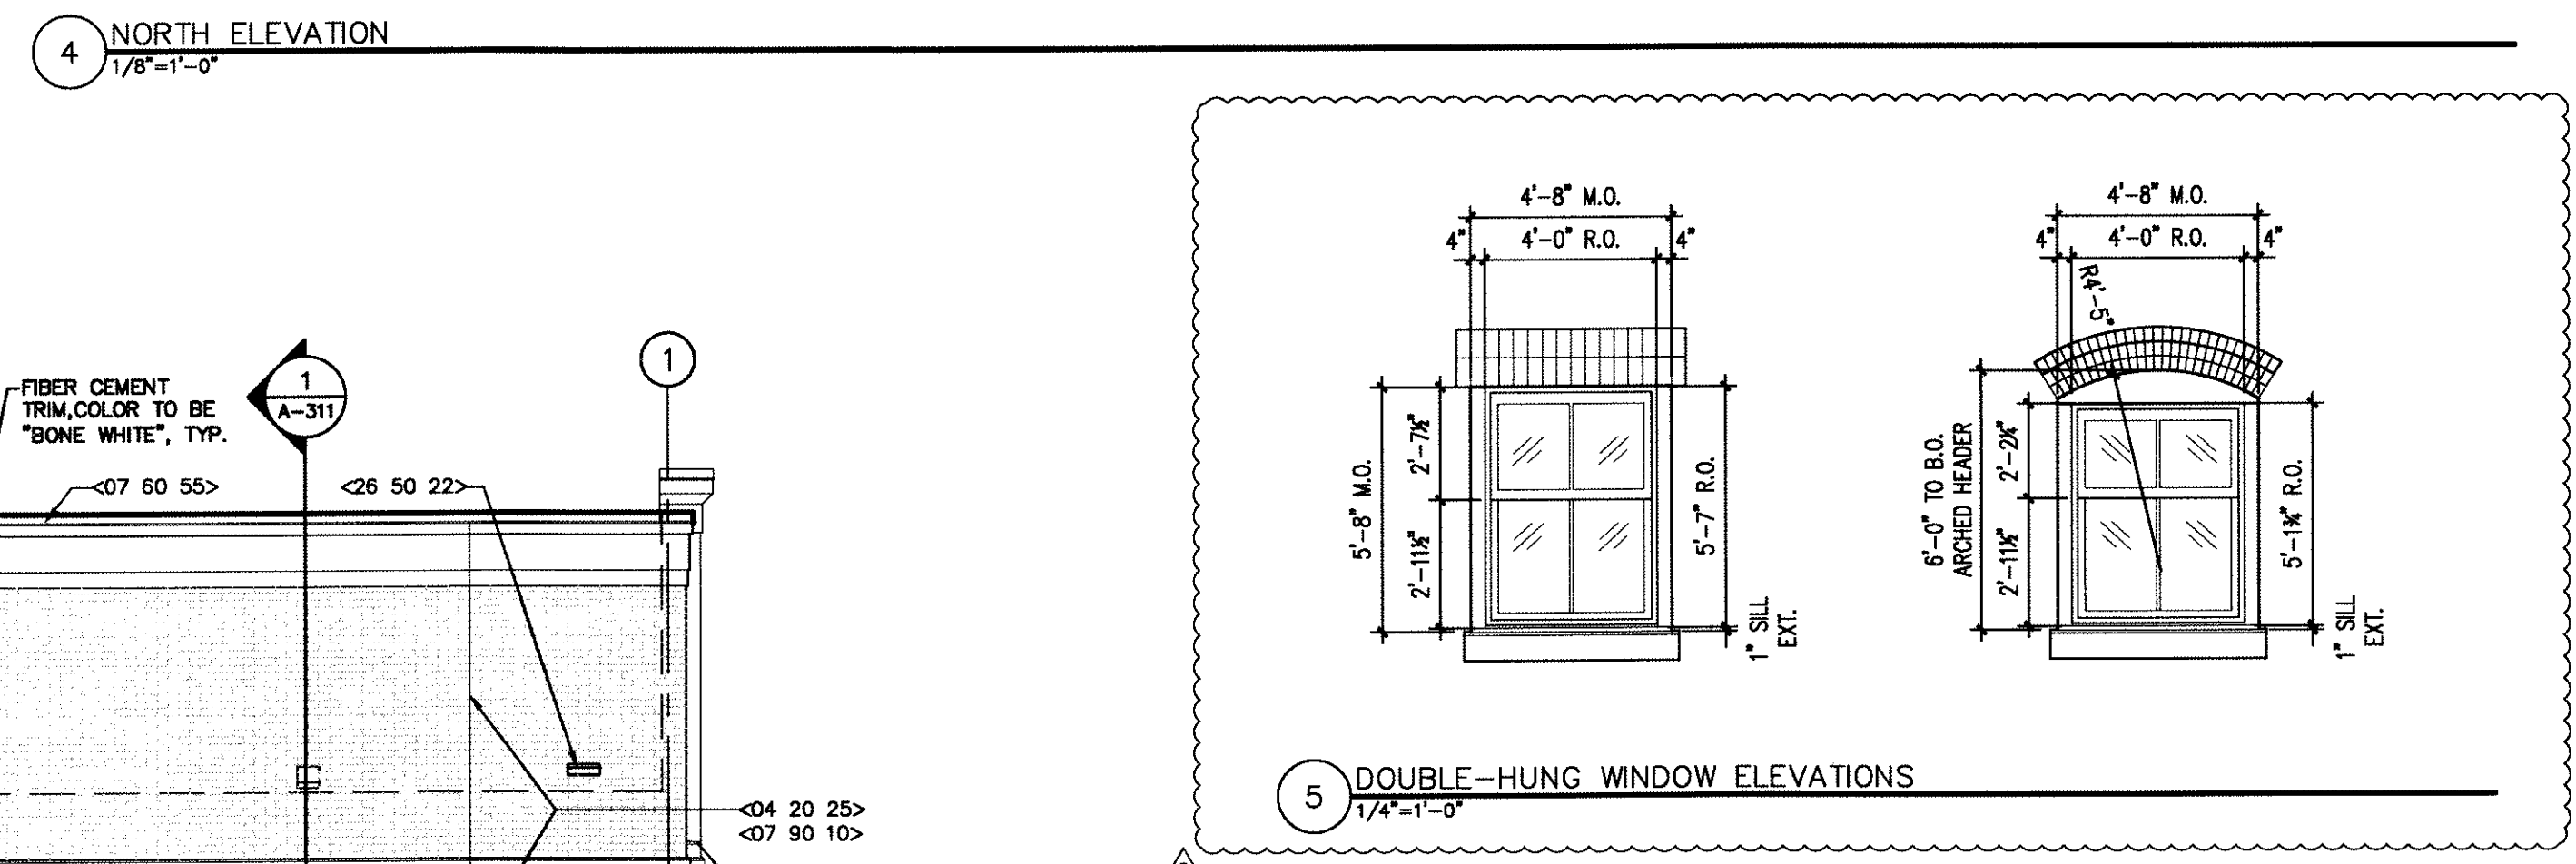
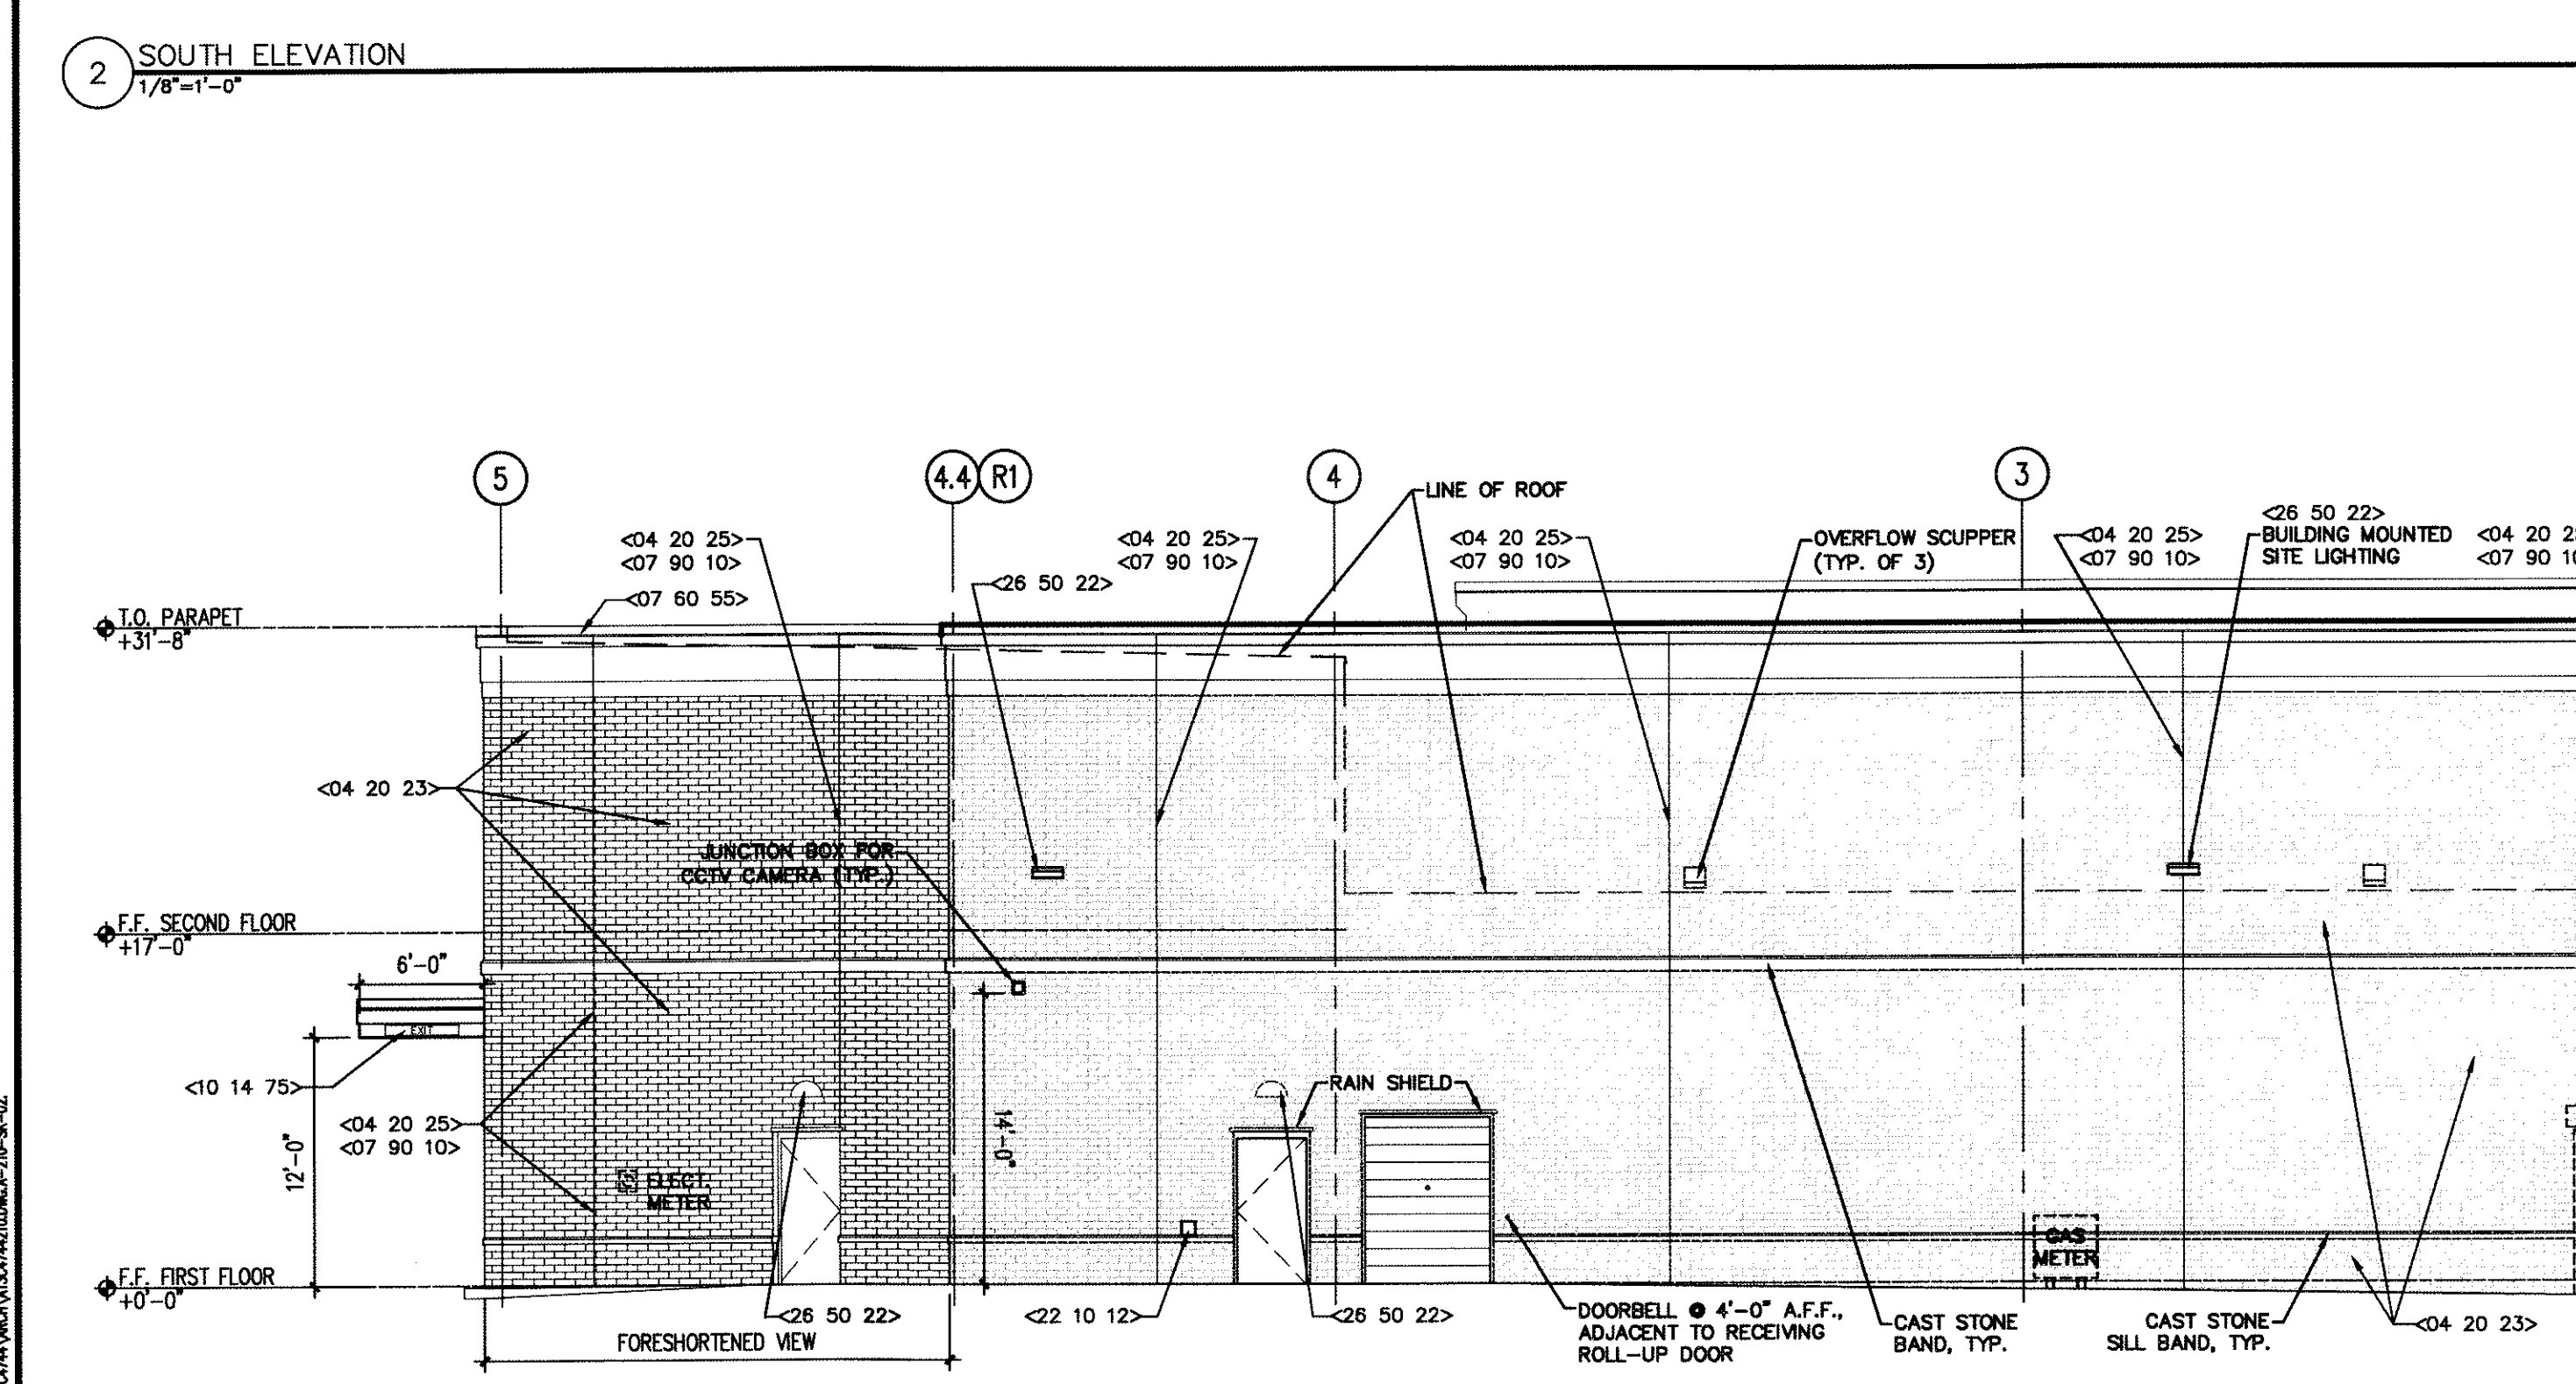



SIGN AREA SUMMARY	
BUILDING SIGNAGE	
NORTH ELEVATION	
N/A - (NO SIGNAGE THIS ELEVATION)	0.00 SF
SUBTOTAL	0.00 SF
EAST ELEVATION	
14'-11 3/4" WALGREENS SCRIPT SIGN	49.94 SF
LED 'DRIVE THRU' SIGN - (● DRIVE THRU)	1.80 SF
SUBTOTAL	51.74 SF
SOUTH ELEVATION	
14'-11 3/4" WALGREENS SCRIPT SIGN	49.94 SF
SUBTOTAL	49.94 SF
WEST ELEVATION	
LED 'EXIT' SIGN - (● DRIVE THRU)	1.80 SF
SUBTOTAL	1.80 SF
TOTAL BUILDING SIGNAGE	103.48 SF

REFERENCED KEYED NOTES	
DIVISION 04 - MASONRY -	
04 20 23	UTILITY SIZE FACE BRICK (TYPE 1) COLOR: "ROSEWOOD", FINISH: "VELOUR", 1/3 RUNNING BOND.
04 20 25	CONTROL JOINT WITH BACKER ROD AND SEALANT - COLOR TO MATCH ADJACENT MATERIAL.
DIVISION 05 - METAL -	
05 10 62	1/8" THICK BENT STEEL PLATE (TO PROTECT DOWNSPOUT), BOLTED TO MASONRY. COPE AROUND BULLNOSE. PAINT TO MATCH DOWNSPOUT. SEE DETAIL ON SHEET A-510.
DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES -	
06 10 52	TOTE ROOF. SEE DETAIL ON SHEET C-530.
DIVISION 07 - THERMAL AND MOISTURE PROTECTION -	
07 60 55	PREFINISHED SHEET METAL COPING, GUTTERS AND DOWNSPOUTS. INTERNAL ROOF DRAINS ARE PREFERRED IN NORTHERN CLIMATES.
07 61 04	TOTE STORAGE ROOF.
07 90 10	CONTROL JOINT W/ BACKER ROD AND SEALANT - COLOR TO MATCH ADJACENT MATERIAL.
DIVISION 10 - SPECIALTIES -	
10 14 74	RED "WALGREENS" SCRIPT SIGN, INTERNALLY ILLUMINATED. SEE DETAILS ON SHEET A-730.
10 14 75	INDIVIDUAL LETTER SIGN. SEE SHEET A-730.
10 14 76	BOX SIGN. SEE SHEET A-730.
10 14 80	BOTTOM OF LOWER CASE LETTERS TO BE A MINIMUM OF 18" BELOW ROOF LINE, OR SIGN TO BE MOUNTED ON RACEWAY TO AVOID ROOF MEMBRANE PENETRATION. PAINT RACEWAY TO MATCH BRICK.
DIVISION 22 - PLUMBING -	
22 10 12	WH-1, WALL HYDRANT.
DIVISION 26 - ELECTRICAL -	
26 10 72	JUNCTION BOX FOR RED BOX. FURNISHED AND INSTALLED BY ELECTRICAL CONTRACTOR.
26 50 22	WALL-MOUNTED LIGHT. SEE ELECTRICAL DRAWING.
DIVISION 32 - EXTERIOR IMPROVEMENTS -	
32 12 01	YELLOW DELINEATION POSTS AT DRIVE-UP WINDOW. FASTEN TO CONCRETE WITH BOLTS.
32 12 02	SECURITY BOLLARD W/ GRAY POLYETHYLENE COVER WHEN WALK ADJACENT DRIVE (USED WHEN PERIMETER BOLLARDS ARE ABSENT).

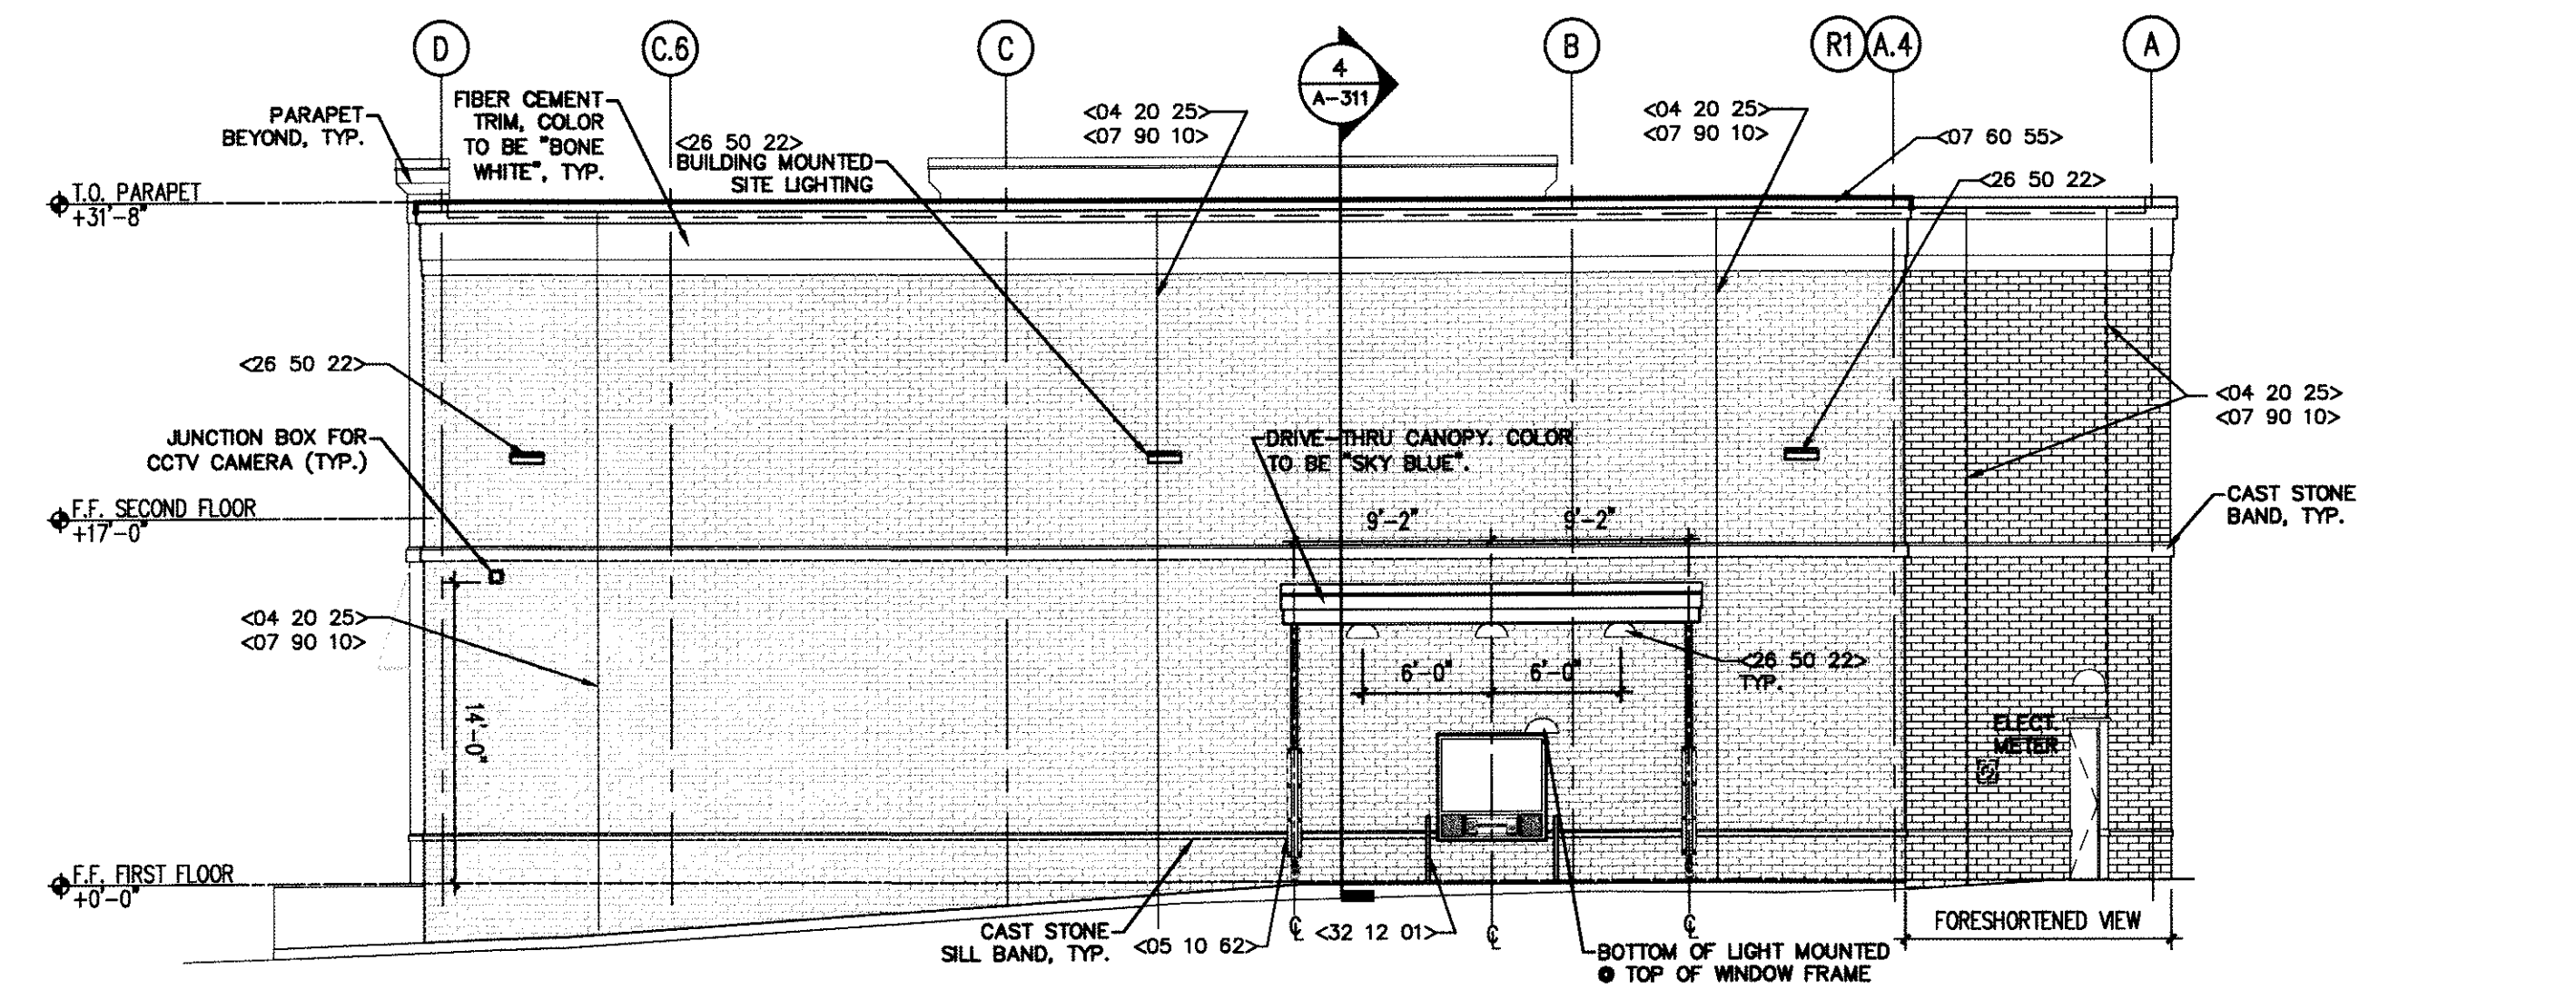

CONTROL JOINT LEGEND				
UNIT TYPE	ASTM DESIGNATION	VERTICAL CONTROL JOINT SPACING	HORIZONTAL REQUIREMENTS	MISCELLANEOUS REFERENCES
CLAY LESTONE	C 216	30' O.C. MAX. - 10' FROM CORNER MAX	SLIP PLANE BETWEEN CMU AND CAST STONE.	SEE BIA TECHNICAL NOTE 18A.
CLAY	C 568			
CONCRETE MASONRY	C 90	SPACING = 1.5 X WALL HEIGHT, 20' O.C. MAX., 4' TO 6' FROM CORNER MAX	WALL TIES @ 16" VERTICAL MAX. PLUS VENEER REINFORCEMENT @ 16" VERTICAL MAX. SLIP PLAN BETWEEN BRICK AND CAST STONE.	UNITS INSTALLED DRY. SEE NCMA TEK 10-1A, 10-4, 12-1A.
CAST STONE	C 1364	SPACING = 1.5 X WALL HEIGHT, 20' O.C. MAX., 4' TO 6' FROM CORNER MAX	WALL TIES @ 16" VERTICAL MAX. SLIP PLAN BETWEEN BRICK AND CMU.	UNITS INSTALLED WET WITH RAKED JOINTS. JOINTS ARE POINTED AFTER SET. EXPOSED HEAD JOINTS TO GET BACKER ROD & SEALANT. SEE CAST STONE TECHNICAL BULLETINS 33, 43 & 44.

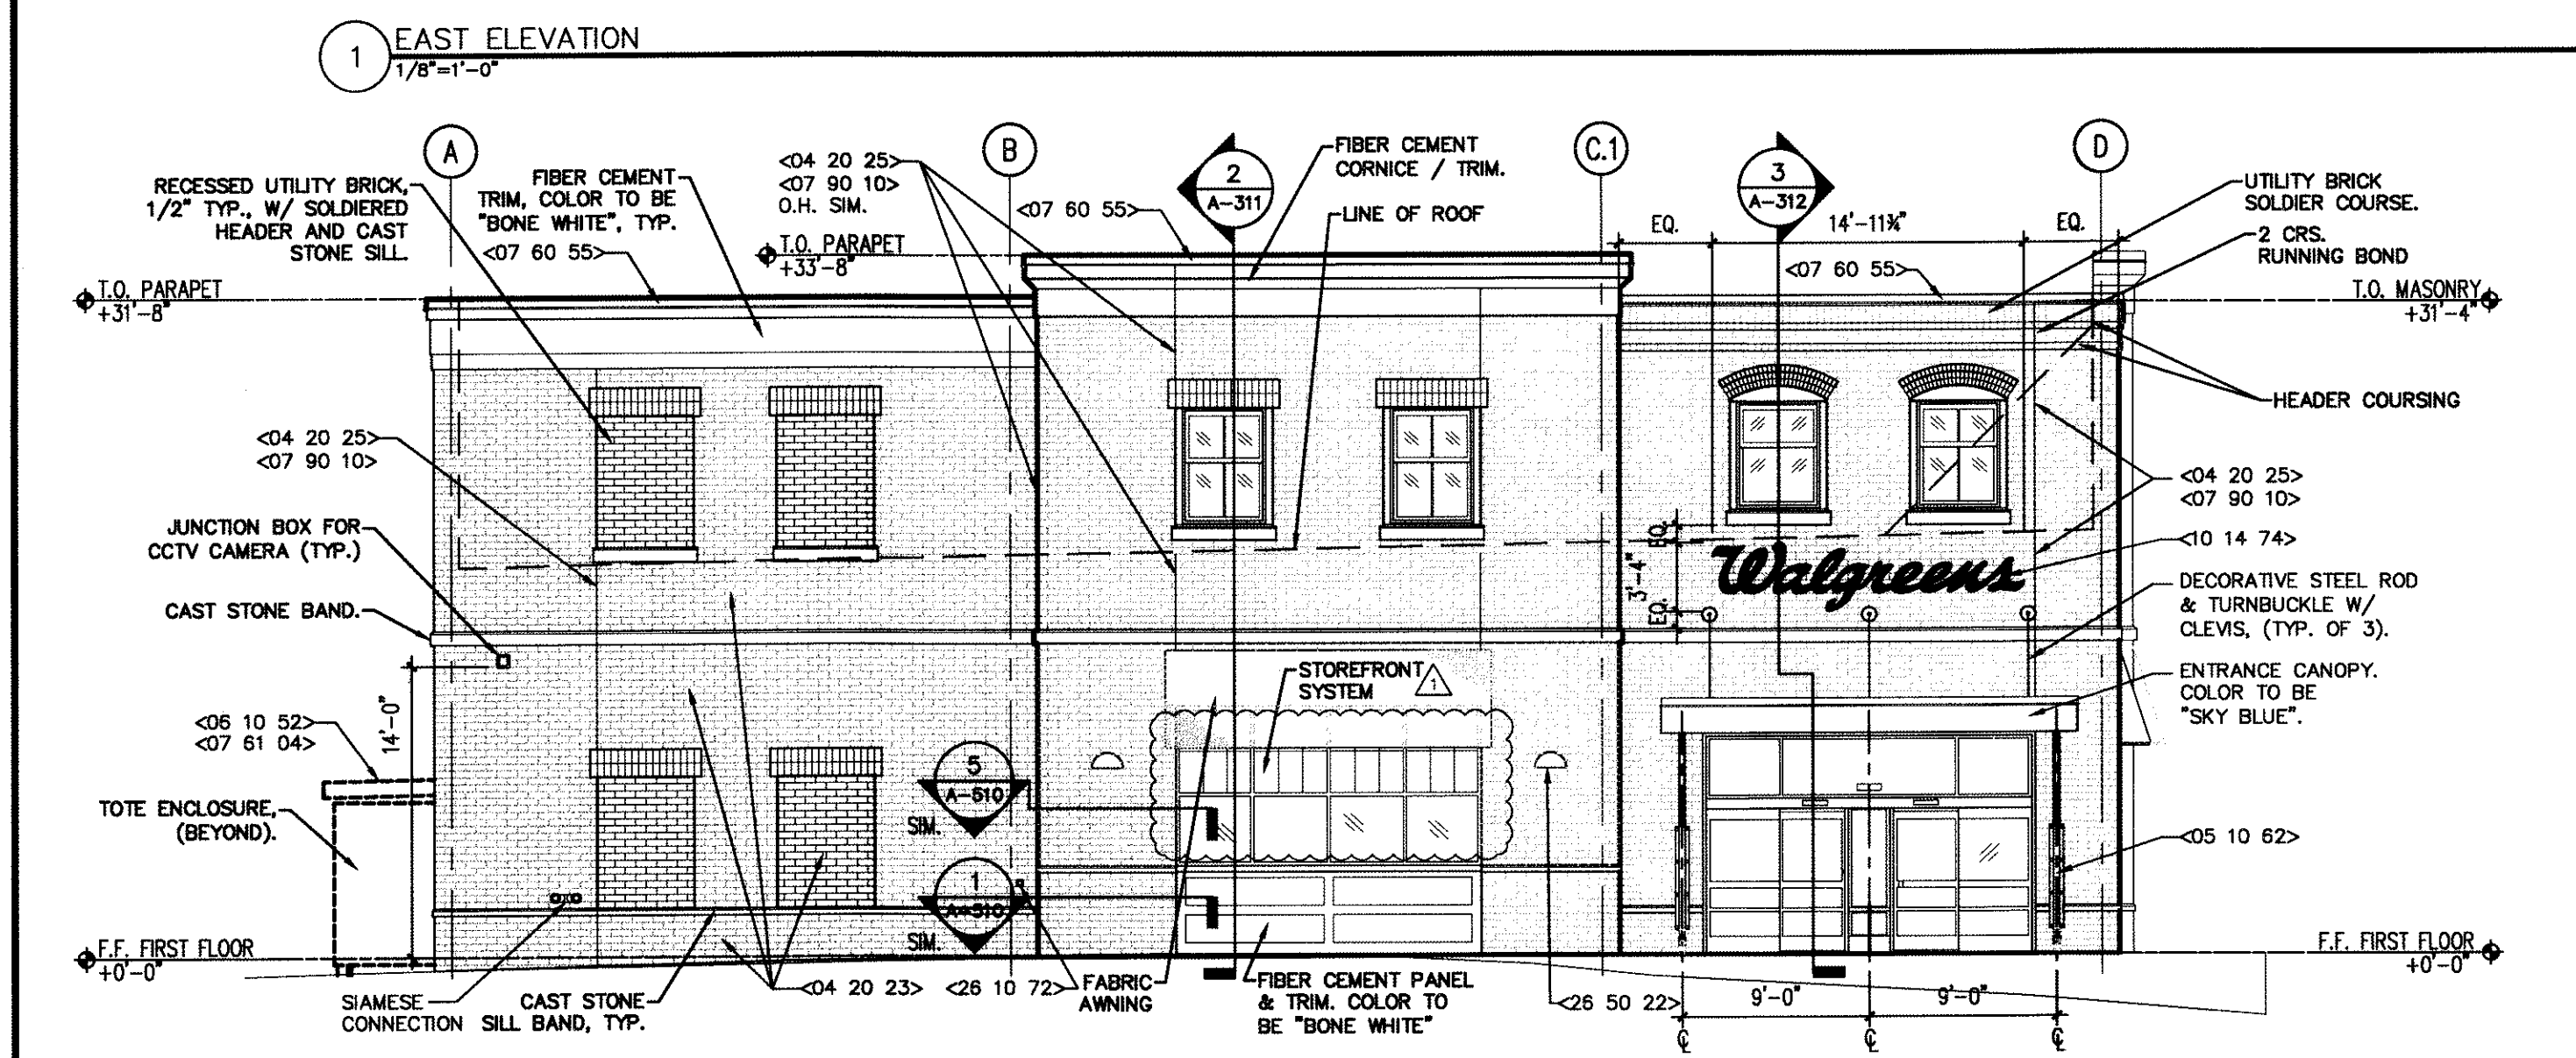

BL Companies
ARCHITECTURE
ENGINEERING
ENVIRONMENTAL
LAND SURVEYING

355 Research Parkway
Meriden, CT 06460
(203) 630-1400
(203) 630-2615 Fax

CONSULTANT PROJECT NO. BD13C4744

NO.	DATE	BY	DESCRIPTION
1			ISSUED FOR PERMITS
2			PERMITS COMMENTS / C.B. UPDATES

EXTERIOR ELEVATIONS

STORE NUMBER 16080

WALGREENS

414 KINGS HIGHWAY
FAIRFIELD, CT 06824

CADD PLOT: 10/20/2014

DRAWN BY: JF

DATE: 04/10/2014

REVIEWED: USA

A-210
SK-02